



Standard Curved & Straight Outreaches

Suited mainly to Street Lights, outreaches are used when a fitting needs to be projected out from a column to a distance of a metre or more. In fact A.D.Coote manufacture and supply both curved and straight outreaches up to a length of 4.5 metres in our standard range. They are used mainly in a streetscape situation when the light needs to be out where the traffic is yet must be directed downwards to prevent spill. Other applications for the use of outreaches is in car parks and lane ways as well a cycle paths and mine sites.



When enquiring about outreach type lighting columns we need to know the fitting being used or at least the mounting, spigot type as well as the mounting height of the light fitting and what type and length outreach is required. From this we are able to calculate the height column required to suit the application.

For further information on Outreaches contact our sales staff.

Spigot Adaptors

Changed your lights and now they won't fit the column? A.D.Coote manufacture the most common spigot adaptors to solve this problem. If it's a post top or a street light we carry or manufacture a spigot adaptor that will marry almost any light to any column spigot. We also stock a 76mm o/d pipe spigot that has a slip fit base section to suit our standard contract columns. This has been an advantage when a customer needs a column and can't wait for it to be manufactured. The spigot adaptor is pressed over the top section of the column which makes it ready to take a standard head frame.

Another adaptor we manufacture and keep in stock is the 48mm o/d to 33mm o/d streetlight adaptor which is used on the Western Power Street Vision range of columns. This means we are able to manufacture one type of outreach thus enabling us to reduce costs and pass the savings on to our customers.







Standard Curved & Straight Outreaches

Curved Outreaches

Code	Description	Weight kg
ORSC05	Single Curved .5m	11
ORSC10	Single Curved 1m	12
ORSC15	Single Curved 1.5m	15
ORSC20	Single Curved 2m	17
ORSC25	Single Curved 2.5m	20
ORSC30	Single Curved 3m	22
ORSC45	Single Curved 4.5m	30
ORDC05	Double Curved .5m	22
ORDC10	Double Curved 1m	24
ORDC15	Double Curved 1.5m	29
ORDC20	Double Curved 2m	34
ORDC25	Double Curved 2.5m	39
ORDC30	Double Curved 3m	44
ORDC45	Double Curved 4.5m	60

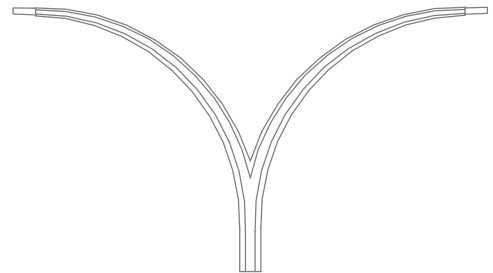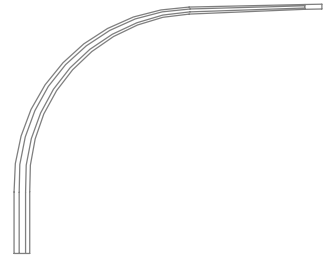

Straight Outreaches

Code	Description	Weight kg
ORSS05	Single Straight .5m	7
ORSS10	Single Straight 1m	9
ORSS15	Single Straight 1.5m	11
ORSS20	Single Straight 2m	13
ORSS25	Single Straight 2.5m	15
ORSS30	Single Straight 3m	18
ORDS05	Double Straight .5m	10
ORDS10	Double Straight 1m	14
ORDS15	Double Straight 1.5m	21
ORDS20	Double Straight 2m	23
ORDS25	Double Straight 2.5m	27
ORDS30	Double Straight 3m	33
ORDC45	Double Curved 4.5m	60

